

SCHEMA TECNICA
TECHNICAL CARD

| | |
|--------------------------------|----------------|
| Articolo / Article | D.O.C. |
| Codice Articolo / Article Code | 8496 |
| Composizione / Composition | 100% PL |
| Peso Gr/mlt / Weight Grs/lmt | 449 |
| Altezza cm / Width cms | 138/140 |

| | |
|---|---|
| Test Martindale UNI EN ISO 12947 - 2 EN 14465, appendix A | Colour degradation after 3000 rubs: 5 Colour degradation after 6000 rubs: 4/5 70.000 Giri / Rubs |
|---|---|

| | |
|--|------------|
| Solidità Luce / Colour Fastness to light UNI EN ISO 105-B02 Blue Scale 1/8 | 4/5 |
|--|------------|


| | |
|---|--|
| Solidità Sfregamento / Colour Fastness to rubbing UNI EN ISO 105-X12 Gray Scale 1/5 | 4 Secco / Dry 3/4 Umido / Wet |
|---|--|

| | |
|------------------------------------|---|
| Test Pilling UNI EN ISO 12945-2 | Degradation average photographic scale 1/5: .5 .5 a 2000 giri / at 2000 revs |
|------------------------------------|---|

| | |
|--|--|
| Scorrimento cuciture / Seams Slippage UNI 9743/90 | Scorrimento / Slippage 6 mm > N Ordito su trama / Warp over weft Scorrimento / Slippage 6 mm > N Trama su ordito / Weft over warp |
|--|--|

| | |
|--|---|
| Resistenza alla lacerazione / Tearing strength UNI EN 29073/4 | N Ordito / Warp N Trama / Weft |
|--|---|

Manutenzione / Maintenance

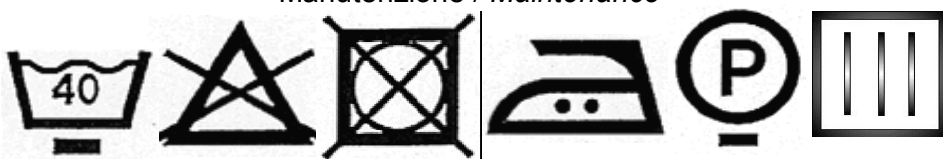

Note/Notes: **Dimensional stability to dry washing (UNI EN ISO 3175)**
warp : +/- 2 % weft : +/- 2 %

Dimensional stability to washing (UNI EN ISO 6330)
warp : +/- 2 % weft : +/- 2 %

* The results are tested in the laboratory and they must be considered as indicative.

ITALVELLUTI S.P.A. - VIA PERUGIA, 29 - 59013 MONTEMURLO (PO) ITALY
TEL.: +39|0574-79711 - FAX: +39|0574-798141 - E-MAIL: info@italvelluti.it